

# Sight Flow Indicators (straight line) with *pipe - thread* connection **BSP (G)** or **NPT**

**Cast Iron** GG 25 ( EN-GJL-250 ) max. 16 bar  
**Cast Steel** GS-C 25 ( 1.0619 / GP240GH )  
**Stainless Steel** WN 1.4408

# NORIS

## Bauform 881

### Application:

The NORIS flow indicators are used for optical control of fluids and gases, for horizontal and vertical pipe-lines.

### Installation:

Optional  
Take care of flow direction

### Operating conditions:

Working pressure: max. 16 / 25 / 40 bar  
Working temperature: max. 150°C or 280°C

### Certificate: (Option )

Acc. to EN 10204 - 2.2 or  
Acc. to EN 10204 - 3.1

### Werkstoffe:

Body	<b>GG 25</b>	<b>GS-C 25</b>	<b>1.4408</b>
Covers	GG 25	GS-C 25	1.4408 / 1.4301
Screws	4.6 / 5.6 gal.		A4-70
Sight glasses	Borosilicate glass DIN 7080 ( 280°C ) Soda lime glass DIN 8902 ( 150°C )		
Gaskets	Graphite, (or other materials)		


### Options:

with - Spinner  
- Flap  
- Sight glass light - fittings

### Ordering example:

Sight Flow Indicators Bauform 881  
Body GG 25,  
Borosilicate glass DIN 7080-16bar,  
G 3/4"

Female-Threaded-Design

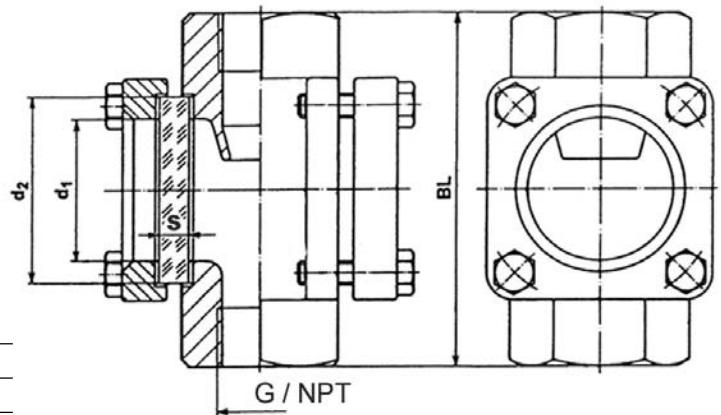

### Dimensions:

BSP (G) or NPT	BL	d <sub>1</sub>	d <sub>2</sub>	Glass plate		
				S		
				16	25	40 bar
1/4" 3/8" 1/2"	100	32	45	10	10	10
3/4" 1"	120	48	63	10	12	15
1 1/4"	160	65	80	12	15	20
1 1/2"	160	65	80	12	15	20
2"	230 180 (GG)	80	100	15	20	25

NPT-thread only in GS-C 25 or 1.4408

Modifications reserved

上海三盛热能技术有限公司

Shanghai Sansheng ThermalTech Co., Ltd.

地址: 上海市徐汇区漕宝路 70 号光大会展中心 C 座 2501 室 / 200235

电话(Tel): 021-54482938 64326951 64326952

传真 (Fax): 021-54481373

网址: [Http://www.sansheng-sh.com](http://www.sansheng-sh.com)

E-mail: [sales@sansheng-sh.com](mailto:sales@sansheng-sh.com)