

# Sight glass - Tubular type

with flanged connetion acc. to DIN

# NORIS

Bauform 20

## Application:

Sightglass - Tubular type with flanges on both sides, to use in either horizontal or vertical pipe lines for optical control of fluids and gasses.

## Operating conditions:

Connection: Flanges PN 10 / 16  
Pressure: up to DN 100 - 6 bar max  
from DN 125 - 4 bar max  
Temperature: 200°C max.

## Materials:

Flanges: WN 1.4571 | Steel H II  
Screws: A4 - 70 | Steel  
Glass tube: Borosilicate glass (DURAN)  
Gaskets: Viton or PTFE

## Spezial designs:



Protection jacket of acrylic glass  
ANSI - Flanges  
Extra length

## Example for an order:

Sight Glass - Tubular Type Bauform 20  
WN 1.4571, Gaskets PTFE  
DN 50, PN 16; 6 bar max.

## Mounting instructions:

Sight glass tubular type must be mounted without tension by tube, vibrations and pressure pushes.

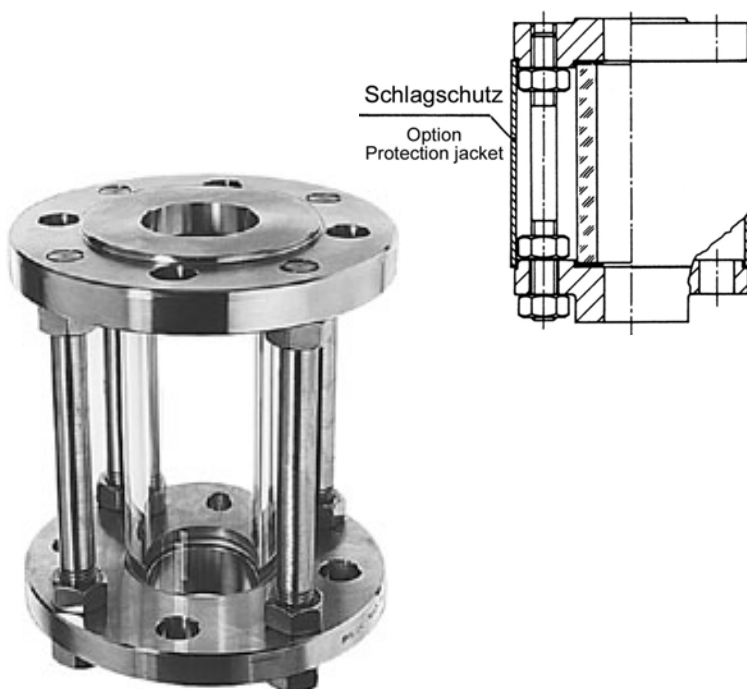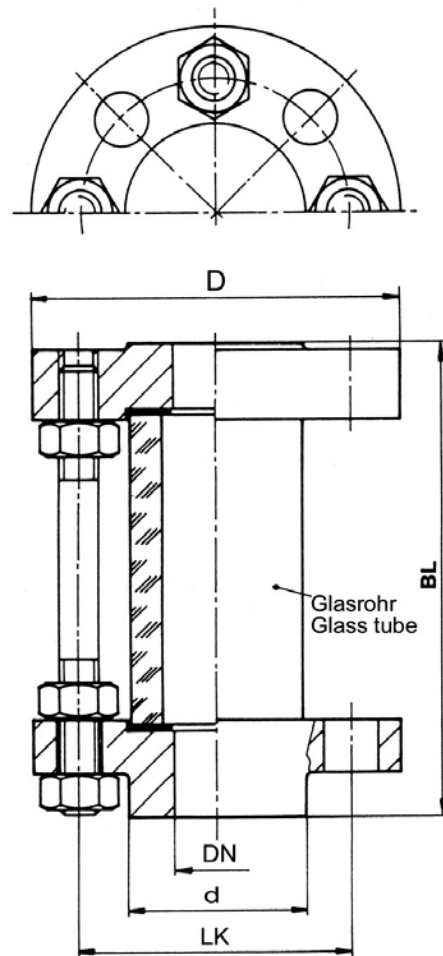

## Dimensions:

DN	D	d	BL	Screws	LK
15	95	45	200	4	65
20	105	58	200	4	75
25	115	68	200	4	85
32	140	78	200	4	100
40	150	88	200	4	110
50	165	102	200	4	125
65	185	122	200	4	145
80	200	138	200	8	160
100	220	158	200	8	180
125	250	188	200	8	210
150	285	212	200	8	240
200	340	242	200	8	295

Modifications reserved

上海三盛热能技术有限公司

地址: 上海市徐汇区漕宝路 70 号光大会展中心 C 座 2501 室 / 200235

电话(Tel): 021-54482938 64326951 64326952

网址: [Http://www.sansheng-sh.com](http://www.sansheng-sh.com)

Shanghai Sansheng ThermalTech Co., Ltd.

传真 (Fax): 021-54481373

E-mail: [sales@sansheng-sh.com](mailto:sales@sansheng-sh.com)