

Sight Glass -Tubular Type

with Indication- and Non-Return-Ball
with Safety Seal-System (acc. to DIN 28121)

NORIS

Bauform 25-B

Operating conditions:

Connection: Flanges PN 10/16

Pressure: 6 bar max.

Temperature: 200°C max.

Materials:

Flanges: WN 1.4571

Screws: A4-70

Glass tube: Borosilicate glass (DURAN)


Ball + Seats: PTFE

Gaskets: PTFE covered

Spezial designs:

Material: Steel

Hollow-ball possible (3 bar max.)

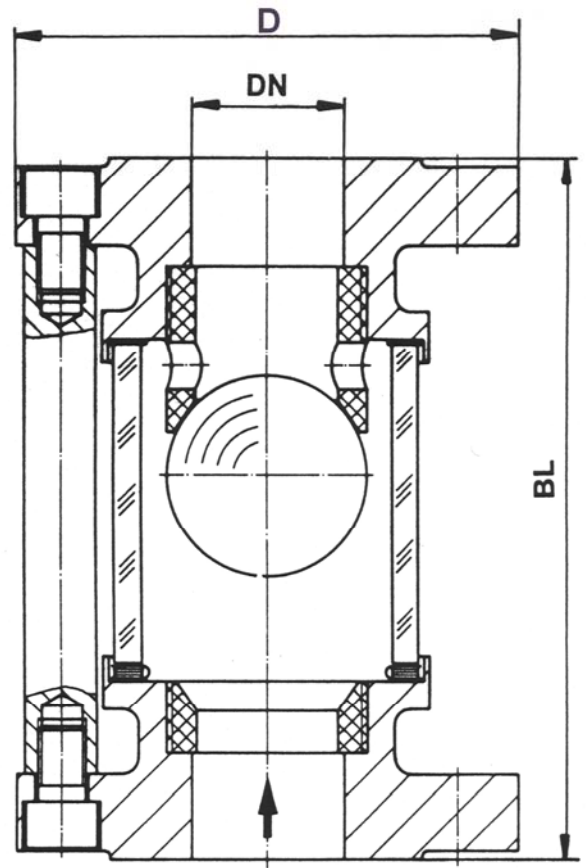

Mounting instructions:

Sight glass tubular type must be mounted without tension by tube, vibrations and pressure pushes.



Dimensions:

DN	D	BL
25	115	160
40	150	200
50	165	230
80	200	310
100	220	350

Modifications reserved

上海三盛热能技术有限公司

Shanghai Sansheng ThermalTech Co., Ltd.

地址: 上海市徐汇区漕宝路 70 号光大会展中心 C 座 2501 室 / 200235

电话(Tel): 021-54482938 64326951 64326952

网址: [Http://www.sansheng-sh.com](http://www.sansheng-sh.com)

传真 (Fax): 021-54481373

E-mail: sales@sansheng-sh.com