

# Sight Flow Indicators (straight line) with *pipe - socket - weld* connection

**Cast Steel** GS-C 25 ( 1.0619 / GP240GH )  
**Stainless Steel** WN 1.4408

# NORIS

## Bauform 880-SOW

### Application:

The flow indicators are used for optical control of fluids and gases, for horizontal and vertical pipe-lines. Also available with internal spinner or flap.

### Installation:

Optional. Take care of flow direction

### Operating conditions:

Working pressure: max. 16 / 25 / 40 bar  
Working temperature: max. 150°C or 280°C

### Certificate: (Option )

Acc. to EN 10204 - 2.2 or 3.1

### Options:


with - Rotor or Flap  
- Sight glass light - fittings

### Materials:

Body	<b>GS-C 25</b>	<b>1.4408</b>
Covers	GS-C 25 / S235JRG2	1.4408 / 1.4301
Screws	4.6 / 5.6 gal.	A4-70
Glasses	Borosilicate glass DIN 7080 ( 280°C ) Soda-lime glass DIN 8902 ( 150°C )	
Gaskets	Graphite, ( or other materials )	

### Ordering example:

Sight Flow Indicators Bauform 880-SOW,  
with socket weld ends  
Body GS-C 25, Borosilicate glass DIN 7080, 16 bar  
DN20 / 3/4"

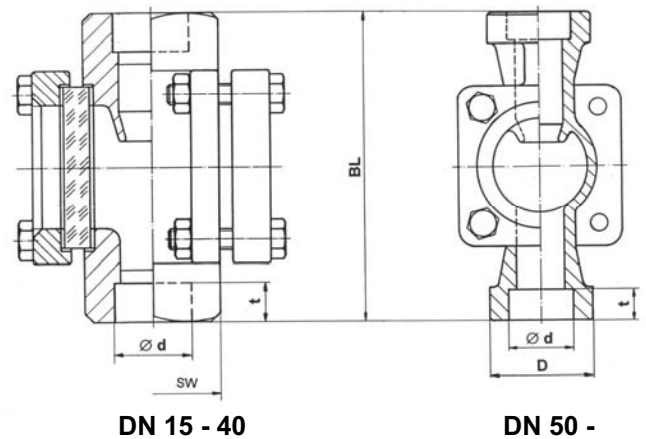

### Dimensions:

nom. size DN / SW	D	Ø d	t	BL
<b>15</b> (1/2")	SW 36	22	10	100
<b>20</b> (3/4")	SW 36	27,5	13	100
<b>25</b> (1")	SW 46	34,5	13	120
<b>40</b> (1 1/2")	SW 75	49	13	160
<b>50</b> (2")	Ø 75	61,5	16	230
<b>80</b> (3")	Ø 120	90	16	310
<b>100</b> (4")	Ø 150	115,5	20	350

Modifications reserved

上海三盛热能技术有限公司

Shanghai Sansheng ThermalTech Co., Ltd.

地址: 上海市徐汇区漕宝路 70 号光大会展中心 C 座 2501 室 / 200235

电话(Tel): 021-54482938 64326951 64326952

传真 (Fax): 021-54481373

网址: [Http://www.sansheng-sh.com](http://www.sansheng-sh.com)

E-mail: [sales@sansheng-sh.com](mailto:sales@sansheng-sh.com)