

Strainer, Y - type

with *pipe - thread* connection

NORIS

Bauform 141

Application:

Preferably installed in front of measuring instruments, control valves, pumps and sensitive systems.

Operating conditions:

Nominal pressure : max. 16 / 40 bar
 Nominal Temp.: max. 200°C

Standard Materials:



Body : Stainless Steel WN 1.4408
 Covers : Stainless Steel WN 1.4408
 Screen: WN 1.4571
 Gasket : PTFE
 Screws: A4 - 70

Options:

Double screen in WN 1.4571
 Drain plug

Ordering example:

Strainer,Y-type Bauform 141
 stainless steel
 G 3/4"

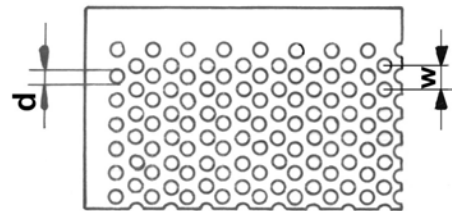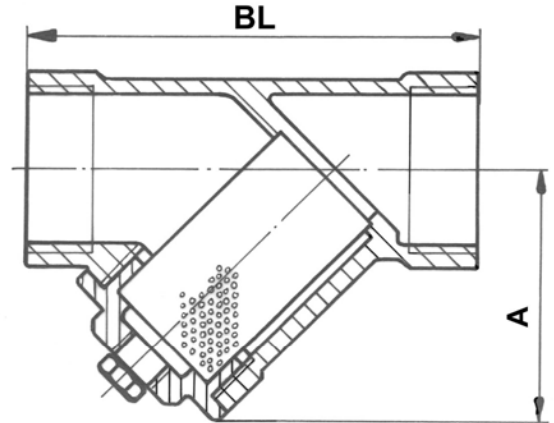

Dimension:

G	BL	A	d
1/2"	61	34	0,6
3/4"	70	39	
1"	86	42	
1 1/4"	100	50	1,0
1 1/2"	111	57	
2"	138	70	

Modifications reserved

上海三盛热能技术有限公司

Shanghai Sansheng ThermalTech Co., Ltd.

地址: 上海市徐汇区漕宝路 70 号光大会展中心 C 座 2501 室 / 200235

电话(Tel): 021-54482938 64326951 64326952

传真 (Fax): 021-54481373

网址: [Http://www.sansheng-sh.com](http://www.sansheng-sh.com)

E-mail: sales@sansheng-sh.com