

## 4.1 Pressureless Dome-Cover

with crossarm profile-gasket




### Standard design

- Wetted material: 1.4571 or 1.4404  
Attachment parts: 1.4301
- Plastic-handles with washer and brass insert (M12)
- Siliconegasket
- Foldable cover
- Surface: Cover: brushed sheet metal, Neck Electropolished, from NW 600  
or neck length > 200 mm neck unpolished, pickled

### Options

- Wetted materials: 1.4462, 1.4539, 1.4435, etc.
- Various gasket qualities
- Various handles (Stainless steel, toggle, nuts etc.)
- Cover swing- and foldable
- Installation of various nozzles (sightglasses, TC-ferrule, etc.)
- With various limit- or proximity-switches
- With safety-grill or safety-cross
- Various surface qualities (polished up to  $Ra < 0,2\mu m$ )
- Neck shaped to match tank-diameter
- etc.

NW	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	s [mm]
100	100	60	110	230	2	2
150	150	65	110	280	2	2
200	200	70	110	335	2	2
250	250	75	110	385	2	2
300	298	85	120	440	2,5	2
400	415	100	120	550	2,5	2
460	460	115	120	595	2,5	2
500	505	125	120	650	2,5	2
600	603	140	120	740	2,5	2
800	810	140	135	950	3	2,5

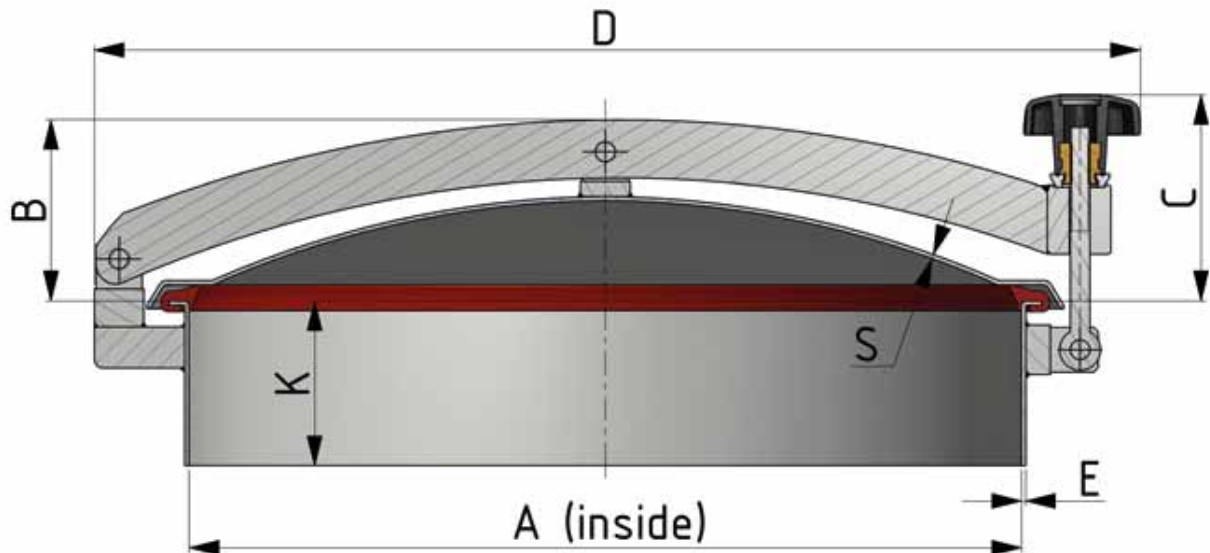

**zimmerlin**  
EDELSTAHL-TECHNIK

Art Nr.	NW	Neck length [k]	Weight [kg]	Price in EUR
310 600	<b>100</b>	60	2,4	
311 000	<b>100</b>	100	2,6	
Neck length per started 50 mm			0,3	
315 600	<b>150</b>	60	2,6	
315 000	<b>150</b>	100	2,8	
Neck length per started 50 mm			0,4	
320 600	<b>200</b>	60	3,3	
321 000	<b>200</b>	100	3,5	
Neck length per started 50 mm			0,5	
325 600	<b>250</b>	60	4,3	
325 000	<b>250</b>	100	4,5	
Neck length per started 50 mm			0,7	
330 600	<b>300</b>	60	5,5	
331 000	<b>300</b>	100	6	
Neck length per started 50 mm			1	
341 000	<b>400</b>	100	10	
341 500	<b>400</b>	150	11	
342 000	<b>400</b>	200	12,5	
Neck length per started 50 mm			1,3	
346 000	<b>460</b>	100	11	
346 500	<b>460</b>	150	12,5	
346 200	<b>460</b>	200	14	
Neck length per started 50 mm			1,5	
351 000	<b>500</b>	100	11,7	
351 500	<b>500</b>	150	13,7	
352 000	<b>500</b>	200	15,6	
Neck length per started 50 mm			1,7	
361 000	<b>600</b>	100	16	
361 500	<b>600</b>	150	18,5	
362 000	<b>600</b>	200	21	
Neck length per started 50 mm			2	
381 000	<b>800</b>	100	31	
381 500	<b>800</b>	150	34	
382 000	<b>800</b>	200	38	
Neck length per started 50 mm			3	

Gaskets see chapter 9.4